

ARAŞTIRMA MAKALESİ / RESEARCH ARTICLE

VEHICULAR COMMUNICATIONS FOR ROAD SAFETY APPLICATIONS

Can BIYIK¹

¹Department of Civil Engineering, Faculty of Engineering and Natural Sciences,
Ankara Yıldırım Beyazıt University, Ankara, Turkey
cbiyik@ybu.edu.tr, ORCID NO: 0000-0001-7156-4143

GELİŞ TARİHİ/RECEIVED DATE: 30.08.2021 KABUL TARİHİ/ACCEPTED DATE: 24.11.2021

Abstract

Computer system frameworks are more modern, similar to vehicles, taking into account that they have PC sensors and are committed to a piece of the vehicle's activity. There is a framework that is cooperative to guarantee an answer that may redesign the security in rush hour gridlock. Correspondences in vehicles are a crisis of the IT innovation that incorporates the vehicle to vehicle, vehicle to framework, vehicle to person on foot correspondence, and the vehicle to everything. Regularly, these vehicles' clients have a hefty dependence on the seat straps and airbags to defend them from any dangers during a mishap. They are like a security net that would defend the gymnastic performers in a bazaar show. The advanced methodology goes past the security nets methodologically, and we ought to battle that the vehicular correspondence networks are not there yet. On the off chance that they are probably going to be available, no trial capacity ought to be finished. There is a conviction of conceivable value of the savvy vehicle coordination that could be higher. The exhibition gauge might be secure further assessment. The innovative work and mechanical consolidation of vehicular correspondence advancements will guarantee a coordinated car innovation. The mix of vehicles' data benefits, their security, and their financial presentation will add to a wise metropolitan transportation structure.

Keywords: Computer system, vehicles, IT innovation, security

YOL GÜVENLİĞİ UYGULAMALARI İÇİN ARAÇ İLETİŞİMİ

Özet

Bilgisayar sistemleri, bilgisayar sensörlerine sahip oldukları ve arabanın çalışmasının bir parçasına adanmış oldukları düşünüldüğünde, arabalar gibi daha karmaşıktır. Trafikte güvenliği artıracak bir çözüm vaat etmek için işbirlikçi bir sistem var. Araçlardaki iletişim, araçtan araca, araçtan altyapıya, araçtan yaya iletişimine ve araçtan her şeye dahil olan BT teknolojisinin acil durumudur. Tipik olarak, bu arabaların kullanıcıları, bir kaza sırasında herhangi bir tehlikeden korunmak için emniyet kemerlerine ve hava yastıklarına büyük güven duyarlar. Bir sirk gösterisinde akrobatları koruyacak bir güvenlik ağına benziyorlar. Modern yaklaşım, metodolojik olarak güvenlik ağlarının ötesine geçiyor ve araç iletişim ağlarının henüz orada olmadığını iddia etmeliyiz. Mevcut olmaları muhtemel ise, deney yeteneği yapılmamalıdır. Akıllı araç koordinasyonunun daha yüksek olabileceğine

dair bir inanç var. Performans tahmini, daha fazla inceleme için güvenli olabilir. Araç iletişim teknolojilerinin araştırılması ve geliştirilmesi ve endüstriyel olarak dahil edilmesi, entegre bir otomotiv teknolojisi sağlayacaktır. Araçların bilgi hizmetlerinin entegrasyonu, güvenlikleri ve ekonomik performansları, akıllı bir kentsel ulaşım çerçevesine katkıda bulunacaktır.

Anahtar Kelimeler: Bilgisayar sistemi, araçlar, BT yeniliği, güvenlik

1. INTRODUCTION

Vehicles are the most confounded processing frameworks. They have different registering and detecting contraptions installed that are intended to be important for the vehicle's personalization. A few frameworks work together productively in guaranteeing there is an answer that may improve traffic wellbeing (Dominguez et al., 2020). Vehicular correspondence is a feature of insightful vehicle frameworks that may utilize remote correspondence innovation to guarantee the scattering of data between the vehicles and the street units. These are frameworks that permit the vehicles to move frameworks and offer data cooperatively to accommodate workers' security and solace (Martínez-Díaz et al., 2019).

The Vehicular correspondence organization (VANETs) has been a beneficiary of wide acknowledgment because of the numerous application in transportation that spotlights on travelers' security, engaged and the financial requests of the public authority, private association, and citizenship (Elagin et al., 2019). VANETs joins remote correspondence and detecting innovations into the vehicles that could be extraordinary in guaranteeing effective figuring and detecting stages. For these frameworks to turn out to be genuine, vehicular correspondence could productively trade security information among vehicles. Consequently, we center around the plan and the correspondence and the systems administration approaches for vehicular security and correspondence (Basir et al., 2019). The examination guarantees a show of the diverse center classes of use and the sorts of administrations they need from a current organization.

Vehicular correspondence is essential for the IoT mechanical development that is comprehensive of the vehicle to vehicle (V2V), vehicle to foundation (V2I), and vehicle to passerby (V2P) correspondence. As of late, the entire vehicle to everything (V2X) incorporated every one of the specificities as referenced before of correspondence that joined vehicles. For example, correspondence is displayed in Figure 1. Further contentions on the VANETs are given in the various subheadings.

V2V correspondence implies that the correspondence exists between street vehicles and rejects the focal control (Obaidat et al., 2020). Vehicles are beneficiaries of the alert messages that may get through the V2V correspondence shipped off the side of the road unit on the off chance that they neglect to get the alert message with a comparative occasion ID from the side of the road unit. Encased data in the notice messages that incorporate occasion IDs, mishap vehicles ID, transmitter ID, and the area of data of the transmitters (regularly through GPS), beneficiaries may typify vital admonition guidance that may avoid impact the encases area data of the transmitter could be used in the beneficiary vehicle in the location of the chance of the message from the vehicle being at the front or at the back (Limbasia and

Das, 2019). The vehicles in the V2V correspondence mode will be particular in the notice messages that encompass the vehicles.

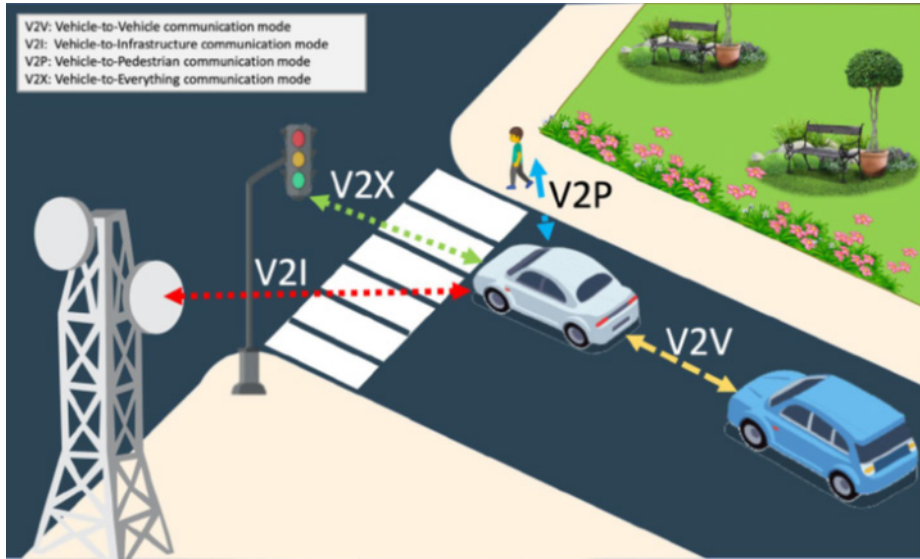


Figure 1. The communication in vehicular Adhoc networks

V2I correspondence implies that the correspondence between the side of the road clients and the side of the road correspondence depends on the present moment and the medium-range innovation (Al-Turjman and Lemayian, 2020). The V2I correspondence is a trade of the remote information between the street system and the vehicles. The framework is empowered by the product, equipment, and firmware; V2I correspondence is remote and bi-directional (Kornaros et al., 2020). The framework's fundamentals incorporate path stamping, street signs, and traffic signals that can give data remotely to the vehicle and the other way around. V2I correspondence can expand the adaptability of the vehicular systems administration conventions and may diminish the coordination between vehicles by sending an impressively clear and less thick foundation (Putnam et al., 2019).

The V2V approach epitomizes walkers' exhaustive set, including incapacitated, individuals strolling or portability gadgets, travelers boarding or landing a transport or train, and individuals riding bicycles. V2P is done to the person on foot of an impending vehicle, and admonitions to the vehicle of the susceptible street client (Duggal et al., 2019).

V2X is an innovation that permits the vehicle to speak with each other with the people on foot and the framework as an upgrade of street wellbeing and portability (Arena and Pau, 2019). The innovation uses a remote sign that conveys the framework's similarity, empowering the improvement of the situational consciousness of the items and the occasions in the climate. As a full acknowledgment of the benefits of V2X, extensive entrance is required (Arena and Pau, 2019). Vehicles ought to have the V2X frameworks installed which convey in comparable vernacular since no interoperability will prohibit the chance of conversing with each other and consequently bargain the worth of network (Arif et al., 2020).

The exploration is isolated into seven segments. The accompanying area presents an outline of the vehicular correspondence network for street security application. The part is an overview of the craftsmanship approach framework, and the answer for the wide scope of the task is for vehicle correspondence frameworks. Section 4 relates the work inside the fields. Section 5 returns to the current techniques that identify with the work on vehicle correspondence. At last, the exploration makes ends in segment 6 through the idea of future examination bearings.

2. VEHICULAR COMMUNICATION APPLICATIONS

The fundamental expectation of the security application is to dodge and diminish the recurrence of street bloodlettings. The most instrumental motivation behind the security related applications in the vehicular organizations is to guarantee there is effectiveness in travelers and walkers' wellbeing and the total security of transport framework (Sujon and Dai, 2021). Exploration has demonstrated that the more critical level of street bloodlettings that happen wherever all around the world are identified with the crossing point, head, backside, and the parallel of the crash of vehicles (Yahaya et al., 2020).

Met crash is not the same as the horizontal impact that happens a solitary way of the traffic stream (Wang and Chan, 2017). They fuse vehicles crossing diverse way. To sidestep this, preventative messages are dispersed to the vehicles that reappear the crossing point out and about by different vehicles and RSUs that contain data to chop down or dispose of the danger of horizontal impacts (Kusmanoff et al., 2020). Convergences are the most risky pieces of the streets. Thus, the devaluation of the quantity of bloodlettings at the convergence is the center motivation behind the following sign infringement cautioning application. The path changing application's job is to help the drivers in switching to another lane where the transmission is being gotten via vehicles close by (Lord et al., 2020). The application can be executed properly if the vehicles keep a table that stores data about the adjoining data, like the areas (Dutta et al., 2020). Perilous spot warning is a worry with the age of data on the driving state of a particular area (Casadei et al., 2019). The dispersed security message is gotten by different vehicles in either signal manners that will permit the driver to avoid a mishap or o sue straightforwardly the vehicles to streamline their wellbeing frameworks. The control misfortune cautioning application is set off when the driver misfortunes control of their vehicle (Dasanayaka et al., 2020). A transmission message to the adjoining vehicles cautions them about the control misfortune occurrence when the getting vehicles survey the importance of the data got and alert different drivers if need be (Wang et al., 2017). The pre money detecting framework is what upgrades drivers when the effect s unavoidable. The vehicles' applications be occasionally imparting pertinent data to the adjoining vehicles that would confront a potential impact predictable (Lemann, 2019). When there is an event of an accident, the vehicles included can connect quicker and dependably in correspondence to trade the data that incorporates the position information (Arif et al., 2019). Vehicle size though the pre-cash development is being scattered. All things considered, the case and the RSU enact the vehicle defensive devices that incorporate airbags, mechanized safety belts pre-tensioners and extendable bumpers to decrease the degree of harm. The application sends an admonition to drivers when they are in the high commonness

of slamming. The Cooperative Forward Collision Parking is a framework that expects to caution drivers if a crash with a vehicle is feasible to happen (Jang et al., 2020).

Periodically the driver's reaction to the crisis ahead is regularly slacking, that the underlying mishap between the two cases will prompt a chain of impacting vehicles (Leiman, 2020). Through the insightful vehicle framework, application crisis data is communicated quicker than in the customary chain of drivers who respond to a vehicle's brake lights ahead (Lee and Atkison, 2020). Inevitable backside crashes are sidestepped by a forecast of the vehicle observing arrangement of the driver's activity. The vehicle alarms its driver when there is jeopardizing closeness that is distinguished (Jeon and Rajamani, 2017). Thus, it furnishes the driver with adequate opportunity to mediate and deflect the cargage. The instrument dodges a chain of crash in the vehicle platooning or the helpful versatile journey (Sun et al., 2017). The crisis electronic brake lights is a framework that guarantees that a vehicle broadcast a self-create crisis brake even to the vehicles behind when the vehicle is in a crisis. The host vehicles will get the data to fittingly think about the data's importance and give an admonition to the drivers. The back brake lights are consistently not a do the trick in following vehicles' alarming in vehicles' deceleration ahead, particularly in low perceivability environmental factors. The crisis electronic prepare light application is applied to the next vehicles' transmission data in the reach. This data comprehensive of the deceleration rate and the area of the vehicle applying the brake.

2.1 Characteristics of Vehicular Communication

Vehicular correspondence is viewed as the future instrumental innovation in the shrewd vehicle framework vehicle organizations (Zaheer et al., 2019). It's anything but a test to the creating plans that offer strength believability and brought down delay. There are the commonplace difficulties that are identified with the vehicular organizations which are speaked in the subsections (Roopa et al., 2019).

Typifying high portability is the most instrumental test in the vehicular organization (Dabiri et al., 2020). Vehicles would move at high velocity bringing about a quick change in the organization geography and, hence, network apportioning. Vehicle specially appointed organizations work with no presence of a focal aspect that will ordinate and deal with the common medium's progress. This prompts the absence of adequate admittance to the channel, and subsequently, a crash between the bundles is inescapable. The transmission power must be figured out how to build the throughput. Hub thickness is instrumental in controlling the transmission power. At the point when the thickness is low, the force ought to be expanded so the messages can arrive at the objections (Alves et al., 2019). On the other hand, the transmission power must be diminished in a high thickness encompassing to eliminate the effect of obstruction and lower the channel clog. Inception of remote correspondence in a cruel encompassing that incorporates vehicular encompassing is a difficult undertaking. Multipath proliferation because of the actual impediments is the focal issue that prompts the corruption of the strength and the heartiness of the got signal (Poursheikhali and Zamiri-Jafarian, 2021). In addition, fain could be capable because of the portability of the encompassing items and the sender-beneficiary development themselves. An expansion in the transmission force could aid the minimization of the effect of blurring (Ye et al., 2020).

3. VEHICULAR NETWORK ARCHITECTURES

Numerous analysts contend that the VANETs is the most grumbling design of the correspondence since it is low in idleness is low expenses related with the organizations' sending (Du et al., 2018; Braga et al., 2018; Yiğitler et al., 2020)

VANETs don't depend on the foundation in supporting the correspondence between the vehicles, like the V2V (Gao et al., 2020). Subsequently, they are effectively deployable. Through representation, the vehicles trade different sorts of data like area and speed, and the nearby vehicle data is gathered to accommodate more secure streets for the driver and the walkers. Radar sensors or lidar sensors can spot hindrances around the vehicle and meddle with the run of the mill voyaging way. Standard radar frameworks use the sensors that dispatch microwave radiates that are sufficiently thin to be reflected by objects and are gotten back by the radar framework.

An unadulterated V2V network standard organization can't get the outside online assets that incorporate the web (Mei et al., 2018). This guarantees the vehicle network that depends on foundation is alluring in a couple of spots. They may give a solid broadband correspondence administration and admittance to the online assets and the nearby administrations that incorporate traffic data, traveler data, etc.

Sending of the V2R network is utilized in the interconnection of vehicles to fix foundations that incorporate the RSUs that are needed in certain spaces (Gao et al., 2020). The V2R network offers a solid broadband assistance of correspondence and admittance to administrations on the web and the nearby administrations that incorporate vacationer and traffic data. For example, radio correspondence is a principle used to change information to different vehicles through the receiving wires (Qiao et al., 2019). A correspondence radio engineering considers a heterogeneous correspondence encompassing. Diverse remote systems administration innovations cooperate to give the best option for correspondence based boundaries: QoS level, significance of data, secrecy, and security. There are two join sorts of administrations that the RSUs can convey (Shladover et al., 2018; Zahid et al., 2018). The first is RSU that si sent to share explicit errands, for example, harbor o incline meter regulator capacities and paring installment gatherers, while different sorts that give network access through remote neighborhood (WRAN) Access Points (APS) and remote immense region Network (WWAN) BSs. The proficient use of the channel assets among the vehicles in the brought together correspondence framework is gotten the job done by the productive medium access control (MAC) convention with flagging and organizer by the RSU or BS (Waqas et al., 2019).

3.1 Vulnerabilities

A remote device empowered and ran a vogue form of the vehicular correspondence parts stack imagine hazard—even the ownership of the data can quantify The effect of the contrasting sorts of assailants (Internal and External reasonable and malevolent autonomous and conniving, Persistent and irregular) can straightforwardly vary (Peng et al., 2020). The vehicle explicit data assortment from overhead

vehicle correspondence will be productive through the arrangement of the vehicle organizations. The surmisings on the drivers' information could be made, consequently abusing the client security. The states of activity, the limitations, and the clients' prerequisites for the vehicle correspondence framework make the security provocative issue, with the most instrumental difficulties that are novel to the vehicular correspondence introduced in the subsection.

The hub availability can be enormously fleeting, a one-time issue. For example, two-vehicle hubs going on a comparable thruway could keep a handset range, or in a couple of wires bounces, for the controlled period. Vehicular organizations come up short on the relativity of extensive setting and the conceivable individual contact of the gadget clients associated with an area of interest or the intermittent association and online help across the web. In this way, a secret key based structure in the security of changes and the continuous advancement of truth is one by the amplification of confided in colleagues or a protected correspondence just with a couple of endpoints that are not reasonable in the security of vehicular correspondence.

The jammer may produce a conscious impedance of transmission that would hinder the correspondence inside the gathering range. As the organization inclusion region, for example, along a parkway, can be suitably characterized prohibitively, sticking is low exertion abuse of chance. An assailant can relate effectively, without trading off cryptographic component and with confined transmission power, the vehicular organization is apportioned. The effectiveness and the idealness of the application information is a massive helplessness. For example, quicker defilement of gigantic segments of the vehicular inclusion regions with distorted data where individual connected creates and scatters adulterated threat signals, for example, ice arrangement on asphalts. Fashioning of messages, modification, and replaying can likewise be used towards pantomime. The messages' source could be recognized at each layer of the stack that could be of optional importance. Regularly it's anything but the source however the substance, for example, a peril cautioning and the body of the message like the area, importance, and newness to the collector that matters the most. An impersonator can be a danger. For example, an aggressor taking on the appearance of a crisis vehicle to deceive different vehicles to back off and give up or a foe mimicking side of the road units parodying the administrations are wellbeing messages.

The multi-variety in the vehicle correspondence innovation and the application's help is the extra test considering the slow arrangement. The hubs could be outfitted with cell handsets, advanced sound and worldwide situating framework (GPS), or Galileo recipients; unwavering quality n these outer foundations couldn't be the most vulnerable connections to getting security. For example, if the GPS flagging mock the rightness, the hub would facilitate and a presumption one on the time exactness. Besides, with a scope of uses with varying necessities, security arrangements need to hold their adaptabilities and stay effective and interoperable. The versatility of the organization with roughly a billion vehicles universally is a test. The blend with a huge number of specialists that administer the transportation framework causes the plan to work with the arrangement of cryptographic test.

4. RELATED WORKS

Associated Vehicle Technology (CVT) required remote information transmission between vehicles (V2V, and the vehicle framework (V2I). Assessing the presentation of different organization options for V2V and V2I correspondence guarantees there is an ideal utility of assets is an essential when planning and creating hearty remote organizations for CVT applications (Chowdhury et al., 2018). In any case, committed short-range correspondence (DSRC) has been viewed as an essential correspondence alternative for CVT wellbeing applications, the utility of other remote advancements, for example, Wi-Fi, LTE, and WiMAX that permit more broadened range interchanges throughput necessities that couldn't be moored by DSRC alone (Singh et al., 2019). Further, the utility of other remote innovation possibly decreases the necessity for exorbitant DSRC framework (Gupta et al., 2020). The analysts analyzed Het-Net's exhibition comprising of Wi-Fi, DSRC, and LTE advancements for VV and V2I correspondences in the examination thus (Abbas et al., 2020). An application layers handoff approach was created by empowering Het-Net correspondence for two CVT applications: traffic information assortment and forward crash notice (Chowdhury et al., 2018). The handoff system ensured there is an ideal utility of the accessible correspondence choices, for example, the disposal of the need of utilizing various correspondence options simultaneously and the relating backhaul correspondence foundation relying upon the associated vehicle portion prerequisites. Field examines done in the examination depicted that Het-Net's utility broadened the reach and V2V and V2I correspondences normal. A long handoff was seen when the application changes from LTE to Wi-Fi. The deferral is because of the required opportunity to enact the 802.11 connection and the time need for the vehicle to connect with the RSU, for example, passages. Changing the application to execute a delicate handoff where another organization is consistently associated prior to parting from the current organization can chop down the interference network administration. Nonetheless, the Het-Net's utility didn't bargain with the traffic information assortment application's presentation since the application didn't require a low dormancy contrasted with the associated vehicle security applications. Field tests have shown that the handoff between the organizations in Het-Net required a few seconds, for example, those that are higher hand 200ms required for safe applications. Accordingly, the Het-Net couldn't have any significant bearing to the security application port that needs correspondence inactivity lower than 200ms. Het-Net could give the extra availability to the protected application to caution the vehicles to participate in exercises that would assert them from risky areas. To approve and build up the discoveries from the field tests that fused the predetermined number of associated vehicles, ns-3 recreation assessments with enormous associated vehicles were finished fusing a DSRC and LTE Het-Net situation. The dormancy and the bundle conveyance mistake would be gotten from the ns-3 reproduction that was equivalent to the field assessment results (Chowdhury et al., 2018).

The exploration makes a suggestion that would diminish the danger of crashes in the cut-in circumstance. It additionally improves the exhibition of the agreeable Adaptive Cruise Control (CACC) as far as wellbeing. In the proposed control technique, the cut in the vehicle's turning signal is used in the virtual vehicle's response that the cut in is dealt with productively and securely. The philosophy is an addition to the CACC framework's wellbeing is cut in circumstances with the detachment of vehicles.

The exploration makes a correlation on the three administered learning procedures that incorporate the help vector machines, irregular woodlands, and the choice trees with the slope supports, which, when applied to the issue of the location path, may change the moves of the distant vehicle utilizing the vehicle to Vehicle (VSV) wellbeing messages that are on a premise on car guidelines. The element is likewise used to prepare an induction of sent estimations that are smooth among the sliding window and may fuse the differential estimations. The ordered preparing and the assessment across the approval are done on a genuine vehicle informational collection that may contain 740 km of the drive information caught at more than 1000 path change moves on the California Highways. The discovering demonstrated that the directed learning strategy effectively made 98.4 percent of the far off vehicle path changes with a mean identification season of 0.3 sec on straight streets and a 89.5 percent of path changes with a mean discovery season of 0.62 sec on bended streets (Haselton et al., 2002). The location calculation likewise demonstrated the solid against the bundle misfortune for a wide scope of stuffed Error Rate (PER). The potential frameworks vehicle impromptu organizations that give security and no wellbeing applications are so significant. The geography of VANETs in metropolitan and rural, and rustic regions can show an all encompassing interconnected and altogether separated or meagerly interconnected character. This relies upon the time or the remote correspondence contraptions' market infiltration rate. In this examination, we investigate the thruway situations and the current plans and execute the new dispersed vehicle multichip broadcast convention that could work in each rush hour gridlock system that incorporates outrageous cases like thick and inadequate traffic systems. DV-CAST is a disseminated communicated convention that is slanted on the neighborhood geography data that handles the VANETs. It is depicted that the presentation of the proposed DV-CAST convention dependent on dependability, adequacy, and versatility in the astounding devoted short-range correspondence (DSRC) was proposed for protected, synergistic application (CSA) in-vehicle interchanges. The examination proposed a two versatile blockage control plot for DSRC based CSA. A cross-layer configuration approach was used with the clog identification at the MAC layer and the application layer's traffic light. The recreation result depicted the proposed rate control plan's proficiency that adjusts to the powerful traffic load. In VANET, the various restrictions that incorporate high portability, high geography modifications, and the restricted transfer speed assume a critical part in lessening the exhibition of VANET. The most instrumental boundaries in nature of administration are clog control. The blockage control is used in ensuring that there is a protected and more dependable correspondence design. Three kinds of techniques are accessible for blockage control and parcel span. Heuristic procedures can be used to characterize heuristic standards and the finding practical to tackle the issues in a sensible time better. According to the heuristic benefits, we are spurred to utilize the approaches that produce adequate VANET. The work is purposed to update the control of blockage with the heuristic philosophies that cut down the traffic correspondence channels. At the same time, the dependable requirements of the application in VANETs, the reenactment module results be shown so that the metaheuristic procedures include the high level exhibition significantly as far as the bundle misfortune delays and the ignition control calculations in the VANETs.

Uses of vehicle security on a premise of vehicle to vehicle correspondence communicates the wellbeing based signals to all the close by course with high dependability and an exacting timetable. Because

of the great vehicle versatility, dynamic organization geography, and a restricted vehicle asset, the intermittent beaconing could cause clog in the correspondence organization. Therefore, the reference point transmission system has a characterized challenge to utilize the restricted organization assets to fulfill the necessary security applications. With this inspiration, we propose another appropriation that plans the plan alluded to as a setting mindfulness guide planning (CABS), which is based on spatial setting data dynamic that is additionally booked utilizing TDMA transmission. The proposed signal booked plan is inspected utilizing different traffic situations with reasonable channel models and IEEE 802.11 PHY/MAC model in the reenactment. The reenactment showed that the CABS plan's presentation was superior to booking the perioding terms of parcel conveyance proportion and the channel delay. The CABS also fulfilled the requirements of security applications.

4.1 Limitations

The underlying instances of the plausible use of GPRS onto the field of ITS show that there is some impediment that incorporates the restricted data transmission of 4.5G frameworks that sway the instantaneousness of the notice message administration, as do the postpones that are presented by the fixed organization. The range on the 5G norms is more critical than the devotion to 4G promotion 4.5G frameworks. Consequently they give crisis cautioning administration through GPRS can be outlined as a starting advance to a more unpredictable arrangement that the men of 4G organizations could give. The GPRS network acquainted the postponements in part with depend on the restricted data transmission of the GPRS framework, as displayed at first. Inside the unique circumstance, the 4G framework's unmistakable job will be to lay with the regard to GRS, which will be in a bigger transfer speed that could affect the nature of the offered administrations.

The framework depended upon correspondence assumes a huge part in the specific circumstance. Taking into account that they can defeat the huge restriction of self-sufficient frameworks, for example, depending on the latent sensors, radars and camcorders dependent on the one-sided view of the encompassing around the vehicle. Limitation of the framework must be reasonable for misusing the led versatile correspondence to give modern ITS administrations. Different issues come from using the sensor frameworks that respect the activity modes and the cutting edge innovation. For example, the lidar sensors are less suitable because of the downpours and the snow sway on their usefulness. The collection of residue could make them unusable.

The current sent innovations for street traffic observation are influenced by absence of traffic boundaries estimation exactness and the genuine me report of occasions on the streets, particularly in the non-industrial countries. The arrangement of too progressed gear to ensure the exact assessment of traffic streams and the ideal identification of crisis occasions couldn't be the best arrangement because of the restricted monetary assets that would uphold the thick organization and hardware upkeep.

To build the scope of correspondence, power control could be utilized, where there is a higher transmission of the force marks held for crisis message dispersal. The crisis messages are scattered in an ensured channel across and are driver that can be reached with an expanded transmission reach to

acknowledge effective detached security. Because of the restricted transmission range, like the most extreme transmission, the level is paperbound. It is expected that not the vehicles in the peril zone can speedily educate regarding an impending mishap, representing a potential danger on a heap mishap. To adequately communicate crisis messages to the vehicles in the peril zones, the vehicle area and the vehicle portability must be considered.

Table 1. Limitations of Vehicular Communication Systems

References	Limitation	Application Name	Technology	Communication
Varga et al. 2020	Systems based on communications can outdo the major restrictions on the autonomous systems that include radars and massive sensors which are majorly on the basis of perception and vehicular surrounding	Environment surrounding the vehicle	General Packet Radio Service	Ad hoc
Varga et al. 2020	The restricted bandwidth of the 4.5G impacts the cautionary message of the service prompt as they delay the introduction of the fixed network	A warning message service	2.5G and 3G systems	Broadcast network, V2I
Jones, 2013	The consideration of the lidar sensors is not as appropriate due to the rain and the snow that influences their functionality. Dust and mu accumulation may make tem unusable	Slow Vehicle Warning	Adaptive cruise control systems	Ad hoc, V2V
Djahel et al. 2014	The existing deployed technologies for the road traffic surveillance are affected by the traffic parameter measurements and the real time analysis of the occurrences of events	Road traffic surveillance	Communication, and dynamic adaptive technologies	Broadcast network, cellular, V2I
Cheng et al. 2015	As a result of the limitations of the transmission range, the expectation is not on the cars in the danger zones though they can be informed promptly of an oncoming carnage that may pose a possible hazards	Emergency messages	Internet backbone	Ad hoc, V2V, V2I
Sichitiu and Kihl, 2008	The majority test beds are on the basis of the IEEE 802.11b hardware on the setup limit that restricts the lower layers of the network	Map Download/Update	Communication technologies	Broadcast network, cellular

Uhlemann, 2015	Wi-Fi system is only designed to connect with ten users at a point. The basis of the first time users to connect manually s as to communicate the traffic condition there are opportunities for delay in the notification ad network failure.	Limited Access and Detour Warning	Communication technologies	Ad hoc, V2V, Broadcast network
----------------	---	-----------------------------------	----------------------------	--------------------------------

The significant mishap of most testbeds is that they are on a premise of IEEE 802.b equipment, while there is accommodation, the arrangement profoundly confines the control of the lower layer of the systems administration stack. Besides, 802.11b utilizes the DSSS tweak. A testbed is on a premise of remote bits that would meet chains in the MAC layer and not in the actual layer. We accept that the radio programming would arrangement that assessed testbed stage to change the useful convention stock.

Uhlemann, (2015) proposed the novel vehicle to a vehicle correspondence framework for the crash form that combines four special remote gadgets (GPS, Wi-Fi, Zigbee, and 3G) with a low force inserted single Board Computer (CBS) as a method of expanding the handling the speed while supporting the minimal expense. The impact aversion information handling is sharp of the preparing information for vehicles on freeways, streets and passages, gridlock, and the indoor V2V correspondence, for example, the necessary vehicle leaves. In Wi-F, areas of interest just speak with 10 clients at a go. In the Wi-Fi-based framework, there is a constraint of time clients need to associate physically with the area of interest to convey. There are odds of deferral in the notices and the breakdown of the organization in high rush hour gridlock conditions.

5. THE EXISTING METHODS IN THE RELATED WORKS

Dey et al. (2016) proposed the application layer handoff strategy to redesign the traffic information assortment and the forward crash notice by empowering heterogeneous organization correspondence. The proposition execution was inspected utilizing remote devotion, committed short-range interchanges, and long haul advancement innovations. It was displayed to expand the scope of correspondence in V2V and V2I. The outcomes showed that because of an increment in the time caused in the edge be handoff between the organizations, the technique couldn't be utilized in the application that required correspondence latencies lower than 200ms (Dey et al. 2016). Ko and Chang (2018) proposed adjusting the cut-in security circumstance into the company under the helpful versatile voyage control utilizing the blinker (CAC-CTS). Approval of the procedure was finished by the specialists who contrasted the CACCTS and the agreeable versatile voyage control (CACC) technique. CACC understood the longitudinal mechanization vehicular control. The set offers the boundaries that may incorporate speed increase, position, speed, and different vehicles dependent on the DSRC/remote access in the vehicular climate innovation. The results found have shown that the between vehicular distance with the proposed procedure is 11.3m while the distance with the CCC s 1.834 is an addition of crash. That shows that the CAC-CTS approach is a decrease of the impact hazards. Khalifa et al. (2020) think about the learning strategies that anchor the vector machines, irregular first, and the choice trees

that have an inclination help in the location of the paths changes through V2V security wrecks for more than 1000 paths change moves in California. The assessment was a characterized execution in bended and straight streets. They used the resultant information and made recommendations in the proficient path changing recognition framework. The discovery path changes of each vehicle traveled the BSMs with a discrete path change express that took three valuations: Lane-keeping (LK), Right Lane Changing (RLC), and Left Lane Changing (LLC). BSMs, permit the vehicle to spread the current position's data, including the GPS provinces, speed, and organizes. The scientists proposed the technique that would update the characterization of the data's presentation to identify the path changing moves through a channel of the wet estimations and the accentuation of the neighborhood changes in vehicle positions. Moreover, the proposition utilized the devoted characterization for straight and bended streets and the approach's utility that presented a postponement for every got message however overhauled the arrangement exactness for the most part and in accuracy. These are features that permit the proposed calculations to recognize 98% of path changes. Gupta et al. (2020) have researched the distinctive hacking procedures that would undermine the unwavering quality of the information sources and the introduced potential alleviation strategies. The exploration exemplifies the dangers found in the low security that would incorporate data fraud promotion corporate surveillance. The exploration additionally proposed a novel system that would update the security of individual information. DV-CAST application is of two methodologies that mean the organization availability and see the transmission concealment procedure to decrease the transmission overhead if there is a thick organization (Tonguz et al. 2010). Simultaneously, there is a store-convey and the forward approach in a meager organization. The organization thickness level depends on the size of the one-bounce adjoining list. The convention overrides the past conventions as they lessen the transmission tempest and adjusts to the steering component that arrangements with the organization detachment block.

In VANETS, the circumstance of the traffic regularly changes between the option scanty and thick conditions. It prompts the dynamism, unusualness, and profoundly portable vehicles, and corruption of utilization execution. The wellbeing application has been impacted by channel blockage undertakings, especially in thick rush hour gridlock circumstance where there were different vehicles hubs broadcast security messages to different vehicles. To address the channel clog issues, distinctive blockage control schematics have been proposed (Zhang et al. 2009; Lee and Jung, 2010). Such plans, the different techniques have been received with the purpose of recognition and control of blockage. Various difficulties have imagined the advancement of an ideal blockage control plot because of the dynamism and the as often as possible changed geographies, and a high portability hub (Stankovic et al. 2003). A media access control (MAC) layer obstructing system in the clog control is used in the prompt and forceful control of the signal message transmission to moderate the blockage. Qureshi et al. (2018) present a devoted short-range correspondence (DSRC) clog control philosophy. The MAC impeding technique gives a high information move rate when the inertness is limited through the remote channel. Zang et al. (2007) have made recommendations for clog control for vehicular security applications (CC-VSA). In the schematic, he tows substantial blockage control approaches were presented by controlling the MAC transmission lines. The arrangement had two kinds of blockage discovery techniques: the estimations

and the occasion drive identification. Wellbeing application control clog when a device distinguishes the security messages created freely or got from different gadgets and dispatched blockage control. The plan starts clog control through the Media Access Control (MAC) line control after the blockage discovery. After identifying the security messages, the undertaking utilizes the beast power that liberates for each MAC transmission line, aside from the conditions of the wellbeing messages line. Unit target Tabu Search (UOTabu) was proposed by Taherkhani and Pierre (2015) for VANETs. The arrangement was embraced to gauge the technique that would control the correspondence channel blockage by figuring the channel utility and the transmission range—the rate thusly will in general limit the postpone work. The procedure was utilized in the Tabu Lis as a momentary memory for the Tabu inquiry calculation. The pursuit was a uni-target conspire that would think about the deferral of a goal work. The specialists made examinations of the plans with the CSMA/CA, UOTabu, and DFPAV plans. After an examination, the UOTab diminishes the deferral and the bundle misfortune and additions the throughput. This plan experiences computational intricacies through the Tabu inquiry calculation. Setting Awareness Beck Scheduling (CABS) was picked as a system of articulating the blockage issue in VANETs (Taherkhani and Pierre, 2016). The plan was embraced as a remarkable contributing strategy for the booked reference point message in regards to vehicle speed, position, and hub heading. The vehicle hub has a time allotment in wording so the TDMA, similar to the transmission. The plan in the channel access was deferred, and the parcel gathering rates were updated. The channel clog was tended to through the tuning of the signal recurrence. The plan doesn't utilize any MAC layer interworking to make acclimations to the time allotments for different information transmissions.

6. DISCUSSIONS AND CONCLUSION

Normally the vehicle clients slant on the safety belts and the airbags to defend them from risks during a mishap, actually like wellbeing nets would shield a competitor's fall in the carnival. The present methodology goes ben the security net. Progressed jumper help framework (ADAS), s custom-made to remarkable drivers' circumstance. They help with staying away from mishaps. In the event that the jumpers neglect to make any recommenced moves. ADAS is doing an amazing errand because of the characteristics that make them wonderful copilot frameworks. They are not occupied, they don't experience the ill effects of emotional episodes and don't burn-through liquor, and they don't get exhausted.

Through lucidity, the vehicle to the vehicle correspondence framework is very convoluted. The expansive subject is certain that the system of each center innovation and business empowering influences are either set up today. They are standing out enough to be noticed as a hindrance to the execution si being tended to and settled. From the public authority principles and commitments, the specialized capacities are the feasible financial models, V2V correspondence is the back term skyline. In the event that there are any statement s that could be mounted dependent on an absence of development, framework, and monetary premise, they would be quickly dispatched given the history of embracing the security related innovation in the American car market. From the ABS to the safety belt airbags, a once American vehicle purchases public selection of the thought and the center bits of wellbeing advancements that

si the best thing to have. There is an ordinary thought about the basic selection requirements that get underestimated as vital subtleties. V2V correspondence will be pervasive in a couple of years with the empowering framework and the innovation.

On the tendency of the philosophy, there must be lenient toward the vehicular correspondence organization. Also, on the off chance that they are, there ought to be an analysis that might want to be finished. A gauge that would profit the assessed regular traffic light frameworks' expense proportion was 40:1 (Mirchandani and Head, 2001). There is a conviction of the conceivable value of insightful vehicle coordination that could be significantly higher. The gauge of the exhibition controls the prerequisites further for examination.

The customary arrangement of remote framework in explicit areas of interest, for example, air terminals and the structure isn't appropriate for care conditions where the vehicles were dispersed broadly on the streets. Also, the significant expenses of organizations of the remote foundation to moor vehicle correspondence. Moreover, to the huge geological size of vehicle organizations, a few difficulties are looked in sending V2R organization (Amadeo et al. 2016). In any case, from the business posting of view, the utility other remote vehicular framework could follow the cell WLAN administrations' means, where they can be offered as an exceptional support of the endorsers for a particular expense. Then again, the radar administrations, for example, traffic checking and the executives, would likewise be given by the public authority.

The innovative work have a modern utilization of the vehicle correspondence advances that would zero in on incorporating car and data innovation. The vehicles' coordinated data administration, vehicle wellbeing, and financial execution would partake in the clever metropolitan vehicle frameworks improvement. VANET has a few difficulties: versatility, productive and solid data spread, and security, to give some examples, that permitted the government organizations, vehicle corporates, and the scholarly world to play out a demanding exploration action that expects to discover the answer for the issues. Further exertion is expected to investigate the steady advances, widespread principles, and insightful vehicle frameworks' adaptability.

7. REFERENCES

Abbas, F., G. Liu, P. Fan, and Z. Khan. 2020. "An Efficient Cluster Based Resource Management Scheme and Its Performance Analysis for V2X Networks", *IEEE Access*, Volume 8, pp. 87071-87082.

Al-Turjman, F., and J.P. Lemayian. 2020. "Intelligence, security, and vehicular sensor networks in internet of things (IoT)-enabled smart-cities: An overview", *Computers & Electrical Engineering*, Volume 87, pp. 106776.

Alves, R.C., D.A. Oliveira, G.A.N. Segura, and C.B. Margi. 2019. "The cost of software-defining things:

A scalability study of software-defined sensor networks”, *IEEE Access*, Volume 7, pp. 115093-115108.

Amadeo, M., C. Campolo, and A. Molinaro. 2016. “Information-centric networking for connected vehicles: a survey and future perspectives”, *IEEE Communications Magazine*, Volume 54, No 2, pp. 98-104.

Arena, F., and G. Pau. 2019. “An overview of vehicular communications”, *Future Internet*, Volume 11, No 2, pp. 27.

Arif, M., G. Wang, M.Z.A. Bhuiyan, T. Wang, and J. Chen. 2019. “A survey on security attacks in VANETs: Communication, applications and challenges”, *Vehicular Communications*, Volume 19, pp. 100179.

Arif, M., G. Wang, O. Geman, V.E. Balas, P. Tao, A. Brezulanu, and J. Chen. 2020. “Sdn-based vanets, security attacks, applications, and challenges”, *Applied Sciences*, Volume 10, No 9, pp. 3217.

Basir, R., S. Qaisar, M. Ali, M. Aldwairi, M.I. Ashraf, A. Mahmood, and M. Gidlund. 2019. “Fog computing enabling industrial internet of things: State-of-the-art and research challenges”. *Sensors*, Volume 19, No 21, pp. 4807.

Braga, D.D.S., M. Niemann, B. Hellingrath, and F.B.D.L. Neto. 2018. “Survey on computational trust and reputation models”, *ACM Computing Surveys (CSUR)*, Volume 51, No 5, pp. 1-40.

Casadei, R., G. Fortino, D. Pianini, W. Russo, C. Savaglio, and M. Viroli. 2019. “Modelling and simulation of opportunistic IoT services with aggregate computing”, *Future Generation Computer Systems*, Volume 91, pp. 252-262.

Cheng, J., J. Cheng, M. Zhou, F. Liu, S. Gao, and C. Liu. 2015. “Routing in internet of vehicles: A review”, *IEEE Transactions on Intelligent Transportation Systems*, Volume 16, No 5, pp. 2339-2352.

Chowdhury, M., M. Rahman, A. Rayamajhi, S.M. Khan, M. Islam, Z. Khan, and J. Martin. 2018. “Lessons learned from the real-world deployment of a connected vehicle testbed”, *Transportation Research Record*, Volume 2672, No 22, pp. 10-23.

Chowdhury, M., M. Rahman, A. Rayamajhi, S.M. Khan, M. Islam, Z. Khan, and J. Martin. 2018. “Lessons learned from the real-world deployment of a connected vehicle testbed”, *Transportation Research Record*, Volume 2672, No 22, pp. 10-23.

Dabiri, S., N. Marković, K. Heaslip, and C.K. Reddy. 2020. “A deep convolutional neural network based approach for vehicle classification using large-scale GPS trajectory data”, *Transportation Research Part C: Emerging Technologies*, Volume 116, pp. 102644.

Dasanayaka, N., K.F. Hasan, C. Wang, and Y. Feng. 2020. "Enhancing Vulnerable Road User Safety: A Survey of Existing Practices and Consideration for Using Mobile Devices for V2X Connections", arXiv preprint arXiv:2010, pp..15502.

Dey, K.C., A. Rayamajhi, M. Chowdhury, P. Bhavsar, and J. Martin. 2016. "Vehicle-to-vehicle (V2V) and vehicle-to-infrastructure (V2I) communication in a heterogeneous wireless network-Performance evaluation", Transportation Research Part C: Emerging Technologies, Volume 68, pp. 168-184.

Djahel, S., R. Doolan, G.M. Muntean, and J. Murphy. 2014. "A communications-oriented perspective on traffic management systems for smart cities: Challenges and innovative approaches", IEEE Communications Surveys & Tutorials, Volume 17, No 1, pp. 125-151.

Dominguez, X., P. Mantilla-Perez, and P. Arboleya. 2020., "Toward Smart Vehicular dc Networks in the Automotive Industry: Process, computational tools, and trends in the design and simulation of vehicle electrical distribution systems". IEEE Electrification Magazine, Volume 8, No 1, pp. 61-68.

Du, R., P. Santi, M. Xiao, A.V. Vasilakos, and C. Fischione. 2018. "The sensible city: A survey on the deployment and management for smart city monitoring", IEEE Communications Surveys & Tutorials, Volume 21, No 2, pp. 1533-1560.

Duggal, G., S.S. Ram, and K.V. Mishra. 2019. "Micro-Doppler and micro-range detection via Doppler-resilient 802.11 ad-based vehicle-to-pedestrian radar". In 2019 IEEE Radar Conference (RadarConf), pp. 1-6

Dutta, A.K., M. Elhoseny, V. Dahiya, and K. Shankar. 2020. "An efficient hierarchical clustering protocol for multihop Internet of vehicles communication", Transactions on Emerging Telecommunications Technologies, Volume 31, No 5, pp 3690.

Elagin, V., A. Spirkina, M. Buinevich, and A. Vladyko. 2020. "Technological aspects of blockchain application for vehicle-to-network". Information, Volume 11, No 10, pp. 465.

Gao, H., C. Liu, Y. Li, and X. Yang. 2020. "V2VR: reliable hybrid-network-oriented V2V data transmission and routing considering RSUs and connectivity probability", IEEE Transactions on Intelligent Transportation Systems.

Gao, H., C. Liu, Y. Li, and X. Yang. 2020. "V2VR: reliable hybrid-network-oriented V2V data transmission and routing considering RSUs and connectivity probability". IEEE Transactions on Intelligent Transportation Systems.

Gupta, M., M. Abdelsalam, and S. Mittal. 2020. "Enabling and enforcing social distancing measures using smart city and its infrastructures: a COVID-19 Use case" arXiv preprint arXiv:2004, pp. 09246.

Gupta, R., S. Tanwar, S. Tyagi, and N. Kumar. 2020. "Machine learning models for secure data analytics: A taxonomy and threat model", *Computer Communications*, Volume 153, pp. 406-440.

Jang, J., J. Ko, J. Park, C. Oh, and S. Kim. 2020. "Identification of safety benefits by inter-vehicle crash risk analysis using connected vehicle systems data on Korean freeways", *Accident Analysis & Prevention*, Volume 144, pp. 105675.

Jeon, W., and R. Rajamani. 2017. "Rear vehicle tracking on a bicycle using active sensor orientation control", *IEEE Transactions on Intelligent Transportation Systems*, Volume 19, No 8, pp. 2638-2649.

Jones, S. 2013. "Cooperative adaptive cruise control: Human factors analysis (No. FHWA-HRT045-13-). United States", Federal Highway Administration. Office of Safety Research and Development.

Khalifa, A.B., I. Alouani, M.A. Mahjoub, and A. Rivenq. 2020. "A novel multi-view pedestrian detection database for collaborative Intelligent Transportation Systems", *Future Generation Computer Systems*, Volume 113, pp. 506-527.

Ko, W., and D.E. Chang. 2018. "Cooperative adaptive cruise control using turn signal for smooth and safe cut-in", In 2018 18th International Conference on Control, Automation and Systems (ICCAS), IEEE, pp. 807-812.

Kornaros, G., O. Tomoutzoglou, D. Mbakoyiannis, N. Karadimitriou, M. Coppola, E. Montanari, and G. Gherardi., 2020. "Towards holistic secure networking in connected vehicles through securing CAN-bus communication and firmware-over-the-air updating", *Journal of Systems Architecture*, Volume 109, pp. 101761

Kusmanoff, A.M., F. Fidler, A. Gordon, G.E. Garrard, and S.A. Bekessy. 2020. "Five lessons to guide more effective biodiversity conservation message framing", *Conservation Biology*, Volume 34, No 5, pp. 1131-1141.

Lee, J.H., and I.B. Jung. 2010. "Adaptive compression based congestion control technique for wireless sensor networks", *Sensors*, Volume 10, No 4, pp. 2919-2945.

Lee, M., and T. Atkison. 2020. "VANET applications: Past, present, and future", *Vehicular Communications*, pp. 100310.

- Leiman, T.** 2020. "Law and tech collide: foreseeability, reasonableness and advanced driver assistance systems", *Policy and Society*, pp. 1-22.
- Lemann, A.B.** 2019. "Autonomous vehicles, technological progress, and the scope problem in products liability", *Journal of tort law*, Volume 12, No 2, pp. 157-212.
- Limbasiya, T., and D. Das.** 2019. "Lightweight secure message broadcasting protocol for vehicle-to-vehicle communication". *IEEE Systems Journal*, Volume 14, No 1, pp. 520-529.
- Lord, S., M.S. Cloutier, B. Garnier, and Z. Christoforou.** 2018. "Crossing road intersections in old age—With or without risks? Perceptions of risk and crossing behaviours among the elderly", *Transportation research part F: traffic psychology and behaviour*, Volume 55, pp. 282-296.
- Martínez-Díaz, M., F. Soriguera, and I. Pérez.** 2019. "Autonomous driving: a bird's eye view". *IET Intelligent Transport Systems*, Volume 13, No 4, pp. 563-579.
- Mei, J., K. Zheng, L. Zhao, L. Lei, and X. Wang.** 2018. "Joint radio resource allocation and control for vehicle platooning in LTE-V2V network", *IEEE Transactions on Vehicular Technology*, Volume 67, No 12, pp. 12218-12230.
- Mirchandani, P., and L. Head.** 2001. "A real-time traffic signal control system: architecture, algorithms, and analysis", *Transportation Research Part C: Emerging Technologies*, Volume 9, No 6, pp. 415-432.
- Obaidat, M., M. Khodjaeva, J. Holst, and M.B. Zid.** 2020. "Security and privacy challenges in vehicular ad hoc networks. In *Connected Vehicles in the Internet of Things*", Springer, Cham, pp. 223-251.
- Peng, L., W. Feng, Z. Yan, Y. Li, X. Zhou, and S. Shimizu.** 2020. "Privacy preservation in permissionless blockchain: A survey", *Digital Communications and Networks*.
- Poursheikhali, S., and H. Zamiri-Jafarian.** 2021. "Source Localization in Inhomogeneous Underwater Medium Using Sensor Arrays: Received Signal Strength Approach", *Signal Processing*, pp. 108047.
- Putnam, D., M. Kovacova, K. Valaskova, and V. Stehel.** 2019. "The algorithmic governance of smart mobility: Regulatory mechanisms for driverless vehicle technologies and networked automated transport systems", *Contemporary Readings in Law and Social Justice*, Volume 11, No 1, pp. 21-26.
- Qiao, G., S. Leng, S. Maharjan, Y. Zhang, and N. Ansari.** 2019. "Deep reinforcement learning for cooperative content caching in vehicular edge computing and networks", *IEEE Internet of Things Journal*, Volume 7, No 1, pp. 247-257.

Qureshi, K.N., A.H. Abdullah, O. Kaiwartya, S. Iqbal, R.A. Butt, and F. Bashir. 2018. "A Dynamic Congestion Control Scheme for safety applications in vehicular ad hoc networks", *Computers & Electrical Engineering*, Volume 72, pp. 774-788.

Roopa, M.S., S. Pattar, R. Buyya, K.R. Venugopal, S.S. Iyengar, and L.M. Patnaik. 2019. "Social Internet of Things (SIoT): Foundations, thrust areas, systematic review and future directions", *Computer Communications*, Volume 139, pp. 32-57.

Shladover, S.E., C. Nowakowski, and X.Y. Lu. 2018. "Using cooperative adaptive cruise control (CACC) to form high-performance vehicle streams. Definitions, literature review and operational concept alternatives".

Sichitiu, M.L., and M. Kihl. 2008. Inter-vehicle communication systems: a survey. *IEEE Communications Surveys & Tutorials*, Volume 10, No 2, pp. 88-105.

Singh, P.K., S.K. Nandi, and S. Nandi. 2019. "A tutorial survey on vehicular communication state of the art, and future research directions", *Vehicular Communications*, Volume 18, pp. 100164.

Stankovic, J.A., T.E. Abdelzaher, C. Lu, L. Sha, and J.C. Hou. 2003. "Real-time communication and coordination in embedded sensor networks", *Proceedings of the IEEE*, Volume 91, No 7, pp. 1002-1022.

Sujon, M., and F. Dai. 2021. "Social Media Mining for Understanding Traffic Safety Culture in Washington State Using Twitter Data", *Journal of Computing in Civil Engineering*, Volume 35, No 1, pp. 04020059.

Sun, M., M. Li, and R. Gerdes. 2017. "A data trust framework for VANETs enabling false data detection and secure vehicle tracking", In *2017 IEEE Conference on Communications and Network Security (CNS)*, pp. 1-9.

Taherkhani, N., and S. Pierre. 2015. "Improving dynamic and distributed congestion control in vehicular ad hoc networks", *Ad Hoc Networks*, Volume 33, pp. 112-125.

Taherkhani, N., and S. Pierre. 2016. "Prioritizing and scheduling messages for congestion control in vehicular ad hoc networks", *Computer Networks*, Volume 108, pp. 15-28.

Tonguz, O.K., N. Wisitpongphan, and F. Bai. 2010. "DV-CAST: A distributed vehicular broadcast protocol for vehicular ad hoc networks", *IEEE Wireless Communications*, Volume 17, No 2, pp. 47-57.

Uhlemann, E. 2015. "Introducing connected vehicles [connected vehicles]", *IEEE Vehicular Technology Magazine*, Volume 10, No 1, pp. 23-31.

Varga, P., J. Peto, A. Franko, D. Balla, D. Haja, F. Janky, and L. Toka. 2020. "5g support for industrial iot applications—challenges, solutions, and research gaps", *Sensors*, Volume 20, No 3, pp. 828.

Wang, P., and C.Y. Chan. 2017. "Vehicle collision prediction at intersections based on comparison of minimal distance between vehicles and dynamic thresholds", *IET Intelligent Transport Systems*, Volume 11, No 10, pp. 676-684

Wang, X., S. Mao, and M.X. Gong. 2017. "An overview of 3GPP cellular vehicle-to-everything standards", *GetMobile: Mobile Computing and Communications*, Volume 21, No 3, pp. 19-25.

Waqas, M., Y. Niu, Y. Li, M. Ahmed, D. Jin, S. Chen, and Z. Han. 2019. "A comprehensive survey on mobility-aware D2D communications: Principles, practice and challenges", *IEEE Communications Surveys & Tutorials*, Volume 22, No 3, pp. 1863-1886.

Yahaya, M., R. Guo, X. Jiang, K. Bashir, C. Matara, and S. Xu. 2020. "Ensemble-based model selection for imbalanced data to investigate the contributing factors to multiple fatality road crashes in Ghana", *Accident Analysis & Prevention*, Volume 151, pp 105851.

Ye, J., S. Guo, and M.S. Alouini. 2020. "Joint reflecting and precoding designs for SER minimization in reconfigurable intelligent surfaces assisted MIMO systems", *IEEE Transactions on Wireless Communications*, Volume 19, No 8, pp. 5561-5574.

Yığıtler, H., B. Badihi, and R. Jäntti. 2020. "Overview of Time Synchronization for IoT Deployments: Clock Discipline Algorithms and Protocols", *Sensors*, Volume 20, No 20, pp. 5928.

Zaheer, T., A.W. Malik, A.U. Rahman, A. Zahir, and M.M. Fraz. 2019. "A vehicular network-based intelligent transport system for smart cities", *International Journal of Distributed Sensor Networks*, Volume 15, No 11, pp. 1550147719888845.

Zahid, T., X. Hei, W. Cheng, A. Ahmad, and P. Maruf. 2018. "On the tradeoff between performance and programmability for software defined WiFi networks", *Wireless Communications and Mobile Computing*.

Zang, Y., L. Stibor, X. Cheng, H.J. Reumerman, A. Paruzel, and A. Barroso. 2007. "Congestion control in wireless networks for vehicular safety applications", In *Proceedings of the 8th European Wireless Conference*, Vol. 7, p. 1.

Zhang, N., M. Yang, Y. Jing, and S. Zhang. 2009. "Congestion control for DiffServ network using second-order sliding mode control", *IEEE Transactions on Industrial Electronics*, Volume 56, No 9, pp. 3330-3336.